

ENERGIZER 371/370


ZEROMERCURY®

SILVER OXIDE



Industry Standard Dimensions

mm (inches)

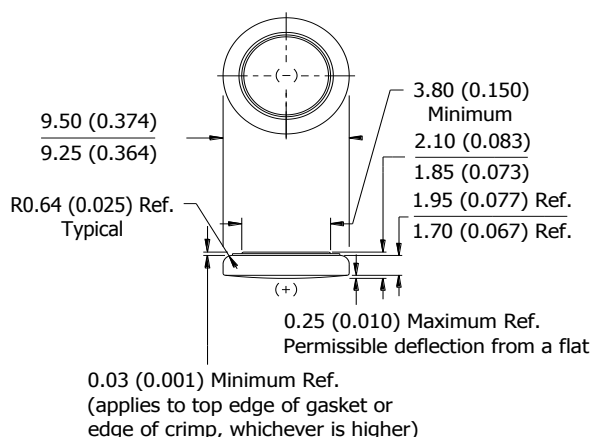


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN
HIGH PULSE ON DEMAND

Specifications

Chemical System:	Silver Oxide Battery (Zn/Ag ₂ O)
Designation:	IEC-SR69
Nominal Voltage:	1.55 Volts
Typical Capacity:	34 mAh* (to 1.2 volts)
Capacity Test:	33K ohm continuous drain at 21°C
Typical Weight:	0.7 grams (0.023 oz.)
	cubic centimeters (0.009 cubic inch)
	20 ohms


*, temperature, and cutoff voltage.

Internal Section

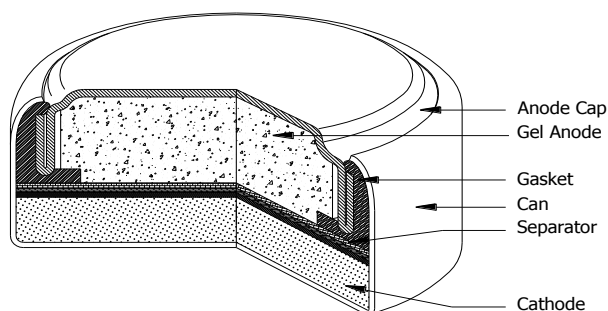

Typical Discharge Characteristics



Typical Performance at 21°C (70°F)

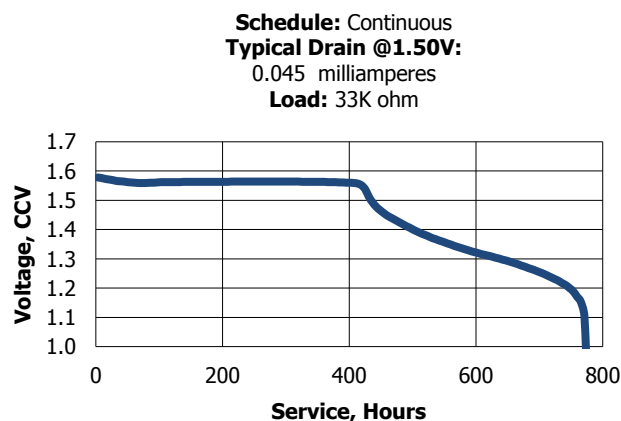

<u>Schedule</u>	<u>Typical Drains</u> at 1.50V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> 1.2V (hours)
Continuous	0.045	33K	748

Temperature Characteristics

Typical Performance at Low Discharge Rates

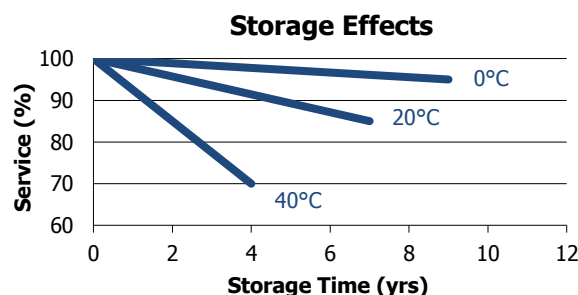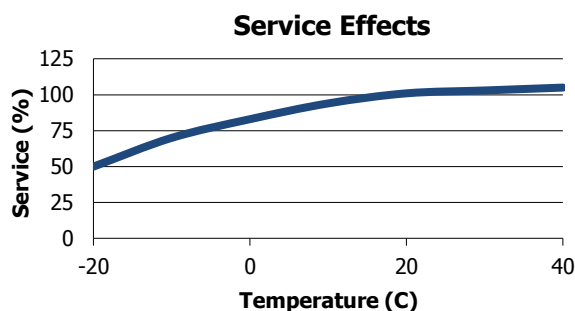

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.